

SuperSpacer TriSeal™




# SuperSpacer TriSeal™

*Super Spacer TriSeal is a flexible, silicone foam spacer designed for Fixed Commercial and Structural Glazing;* it may be utilized for domestic and captured glazing applications which require superior performance.

The unique triple-seal design incorporates an inner acrylic adhesive seal for immediate unit handling.

TriSeal comes complete with captive polyisobutylene (PIB) secondary seal for enhanced gas retention and low- moisture vapour transmission. The outer silicone seal provides proven structural glazing performance.

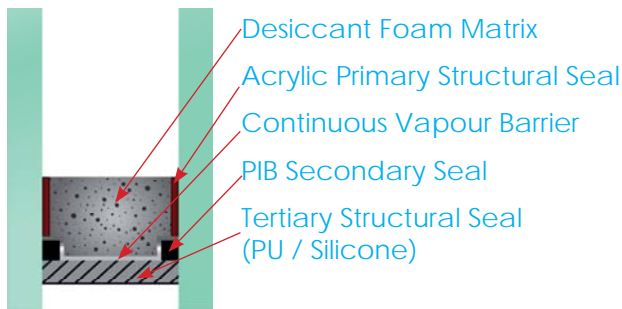

## Insulating glass edged with super spacer satisfies the toughest Warm Edge demands:

- Reduces energy consumption up to 15% within curtain wall glazing systems and up to 29% across glazing systems
- Dramatically reduces seal failure and stress crack callback
- Passes the toughest industry tests (EN 1279)
- Warmer sigtlines up to 16 °F improvement
- **Improves whole window U-Value by up to 12% when compared with aluminium spacer**
- Noise reduction by up to 2dB

*In accelerated testing Super Spacer has been shown to outlast dual seal systems by at least 2 1/2 times and single seals by 5 times*

## Specify Super Spacer TriSeal For Your Next Design



259 Battleford Road,  
Benburb, Dungannon,  
County Tyrone  
BT71 7NP  
Tel: 028 3754 8541

E-mail: [info@camdenglass.co.uk](mailto:info@camdenglass.co.uk)  
Web: [www.camdenglass.co.uk](http://www.camdenglass.co.uk)

Distributor

## What is Super Spacer TriSeal?

- Designed for high performance commercial and structural glazing
- Unique triple seal system
- 100 % Pre - desiccated Structural Foam
- Contains No Metal
- Extreme Durability
- Award winning True Warm™ Technology
- Advanced multi-layer vapour barrier structure
- Excellent Resistance to Nitrogen and Argon Gas Absorption
- 100% memory - allows for expansion and contraction
- Structural integrity No compression set
- Flexible Thermo set structural Foam
- Excellent UV Resistance
- Temperature Resistance (from -60°F to 260°F or -51°C to 127°C)
- Super Spacer TriSeal has a lower profile than standard spacer bars
- Use standard 2mm glazing bridge without compromising window sightline
- No visible spacer bar
- Matt finish reflects colour of the window framing material
- Creates optical illusion of no spacer bar
- Using Super Spacer TriSeal makes a double glazed unit as effective as a triple glazed unit sealed with aluminium spacer

